



## Material data sheet

---

### EOS NickelAlloy IN625

EOS NickelAlloy IN625 is a heat and corrosion resistant nickel alloy powder which has been optimized especially for processing on EOSINT M systems.

This document provides information and data for parts built using EOS NickelAlloy IN625 powder (EOS art.-no. 9011-0022) on the following system specifications:

- EOS DMLS™ system: EOS M290
- HSS recoating blade (2200-4073)
- Argon atmosphere
- Grid nozzle (2200-5501)
- IPCM M sieving module with 63µm mesh recommended (9044-0032)
- Software: EOSYSTEM v.2.5 or newer
- EOS Parameter set IN625 Performance 2.0

### Description

Parts built from EOS NickelAlloy IN625 have chemical composition corresponding to UNS N06625, AMS 5666F, AMS 5599G, W.Nr 2.4856, DIN NiCr22Mo9Nb. This type of alloy is characterized by having high tensile, creep and rupture strength. Conventionally cast or wrought components in this type of nickel alloy have typically excellent fatigue and thermal-fatigue properties combined with good oxidation resistance. EOS NickelAlloy IN625 is expected to have good corrosion resistance in various corrosive environments. Especially sea-water applications require high pitting and crevice corrosion resistance, stress-corrosion resistance against chloride-ions, high tensile and corrosion-fatigue strength. However, corrosion resistance has not been verified yet and therefore it is recommended to conduct relevant corrosion tests and studies prior to use in specific corrosive environment.

Parts built from EOS NickelAlloy IN625 can be heat treated and material properties can be varied within specified range. Parts can be machined, spark-eroded, welded, micro shot-peened, polished and coated in both as-built and in heat-treated conditions. Due to the layerwise building method, the parts have certain anisotropy.



## Material data sheet

---

### Quality Assurance

The quality of the EOS NickelAlloy IN625 powder lots is ensured by the Quality Assurance procedures. The procedures include sampling (ASTM B215), PSD analysis (ISO 13320), chemical analyses (ASTM E2371, ASTM E1409, ASTM E1941, ASTM E1447), and mechanical testing (ISO 6892-1).

The results of the quality assurance tests are given in the lot specific Mill Test Certificates (MTC) according to EN 10204 type 3.1.

## Material data sheet

### Technical Data

#### Powder properties

Material composition [wt.%]	Element	Min	Max
	Cr	20.00	23.00
	Mo	8.00	10.00
	Nb	3.15	4.15
	Fe	-	5.00
	Ti	-	0.40
	Al	-	0.40
	Co	-	1.00
	Si	-	0.50
	Mn	-	0.50
	C	-	0.10
	Ta	-	0.05
	P	-	0.015
	S	-	0.015
	Ni	58.00	bal.

#### Particle size

d50 [1]	35 ± 6 µm
---------	-----------

[1] Particle size distribution analysis according to ISO 13320

## Material data sheet

---

### General process data

---

Layer thickness	40 $\mu\text{m}$
Volume rate [2]	4.2 $\text{mm}^3/\text{s}$ (15.2 $\text{cm}^3/\text{h}$ )

---

- [2] The volume rate is a measure of build speed during laser exposure of the skin area. The total build speed depends on this volume rate and many other factors such as exposure parameters of contours, supports, up and downskin, recoating time, Home-In or LPM settings.

### Physical properties of parts\*

---

Part density [3]	8.4 $\text{g}/\text{cm}^3$
Surface roughness after shot peening [4]	typ. $R_a$ 1–5 $\mu\text{m}$ ; $R_z$ 3–10 $\mu\text{m}$
Hardness as built [5]	typ. 27 HRC

---

- [3] Weighing in air and water according to ISO 3369.
- [4] The numbers were measured at the horizontal (up-facing) and all vertical surfaces of test cubes. Due to the layerwise building the roughness strongly depends on the orientation of the surface, for example sloping and curved surfaces exhibit a stair-step effect.
- [5] Hardness measurement according to standard EN ISO 6508-1:2005

## Material data sheet

### Tensile data at room temperature\* [6,7]

	As built [9]	Heat treated [8,9]
Ultimate tensile strength, Rm		
- in horizontal direction (XY)	Mean 980 MPa StDev. 5 MPa	Mean 1000 MPa StDev. 10 MPa
- in vertical direction (Z)	Mean 870 MPa StDev. 10 MPa	Mean 890 MPa StDev. 10 MPa
Yield strength, Rp0.2%		
- in horizontal direction (XY)	Mean 720 MPa StDev. 5 MPa	Mean 680 MPa StDev. 5 MPa
- in vertical direction (Z)	Mean 630 MPa StDev. 5 MPa	Mean 640 MPa StDev. 5 MPa
Elongation at break, A		
- in horizontal direction (XY)	Mean 33 % StDev. 2 %	Mean 34 % StDev. 2 %
- in vertical direction (Z)	Mean 48 % StDev. 2 %	Mean 49 % StDev. 2 %

[6] The numbers are average values and are determined from samples with horizontal and vertical orientation.

[7] Tensile testing according to ISO 6892-1 B10, proportional test pieces, diameter of the neck area 5 mm (0.2 inch), original gauge length 20 mm (0,79 inch).

[8] Heat treatment procedure: anneal at 870 °C (1600 °F) for 1 hour, rapid cooling.

[9] The values are subject to variations depending on samples orientation on a building platform.



## Material data sheet

---

### Abbreviations

min. minimum

max. maximum

wt. weight

typ. typical


StDev. standard deviation

\*Part properties are provided for information purposes only and EOS makes no representation or warranty, and disclaims any liability, with respect to actual part properties achieved. Part properties are dependent on a variety of influencing factors and therefore, actual part properties achieved by the user may deviate from the information stated herein. This document does not on its own represent a sufficient basis for any part design, neither does it provide any agreement or guarantee about the specific properties of a material or part or the suitability of a material or a part for a specific application.

This powder has not been developed, tested or certified as a medical device according to Directive 93/42/EEC (MDD) or Regulation (EU) 2017/745 (MDR) and is not intended to be used as a medical device, in particular for the purposes specified in Art. 2 No. 1 MDR. Insofar as you intend to use the powder as raw material for the manufacture of pharmaceutical products or medical devices (e.g. as raw material which as a material must meet the requirements of Annex 1, Chapter II MDR), the responsibility and liability for all analyses, tests, evaluations, procedures, risk assessments, conformity assessments, approval and certification procedures as well as for all other official and regulatory measures required for this purpose shall lie solely with you both with regard to the pharmaceutical product and/or medical device manufactured by you and with regard to the properties, suitability, testing, evaluation, risk assessment, other requirements for use of the powder as raw material. This also applies to applications with food contact. In this respect, the limitations of liability pursuant to our General Terms and Conditions and the system sales or material contracts shall apply.

EOS<sup>®</sup>, EOSINT<sup>®</sup>, DMLS<sup>®</sup>, DirectTool<sup>®</sup> and DirectPart<sup>®</sup> are registered trademarks of EOS GmbH.

© 2022 EOS GmbH Electro Optical Systems. All rights reserved.

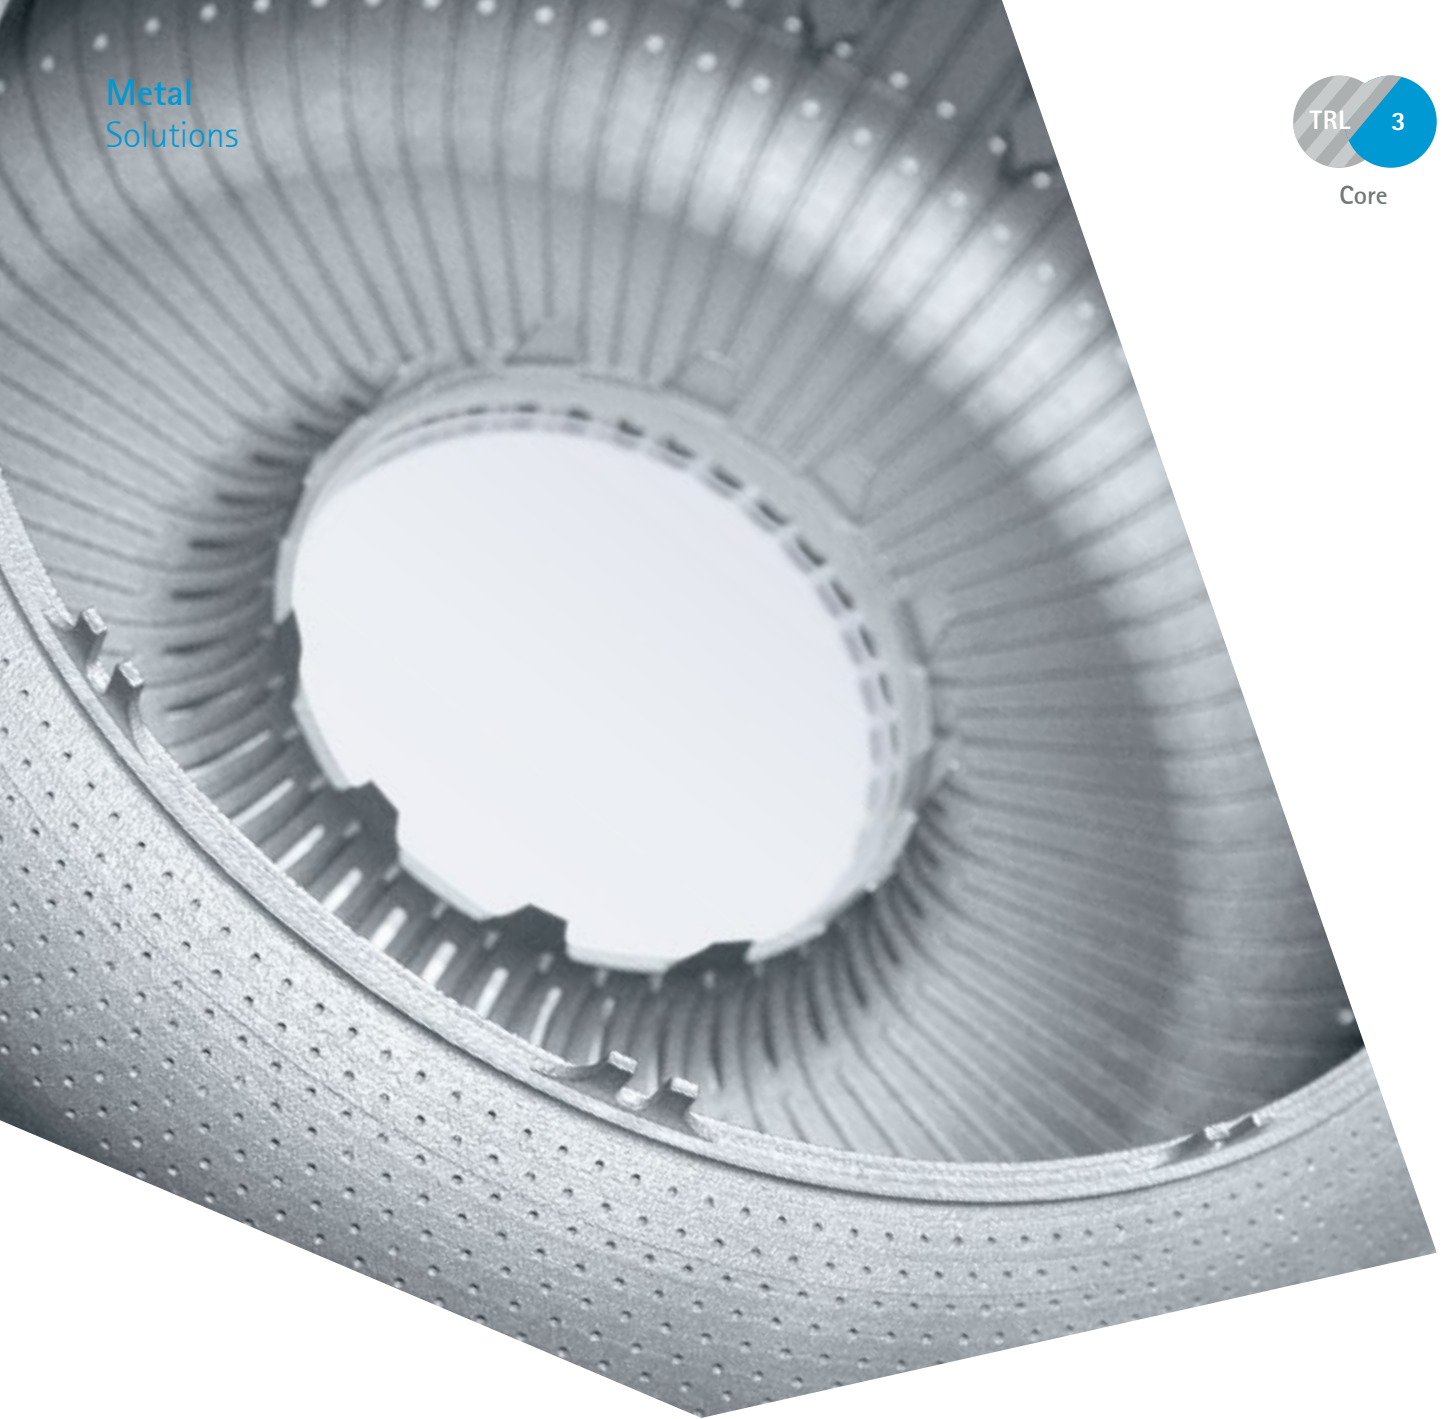

## EOS NickelAlloy IN625 for EOS M 300-4

# EOS NickelAlloy IN625

## EOS M 300-4 | 40 $\mu\text{m}$



EOS NickelAlloy IN625 is a heat and corrosion resistant nickel alloy powder which has been optimized especially for processing on DMLS systems.

Project Partner Materials Solutions, EOS

### Main Characteristics

- High tensile, creep and rupture strength
- Heat and corrosion resistant
- Chemical composition corresponding to UNS N06625, AMS 5666F, AMS 5599G, W.Nr 2.4856, DIN NiCr22Mo9Nb.

### Typical Applications

- Racing applications
- Gas turbines in aerospace and energy
- Ship building industry

### Headquarters


EOS GmbH  
Electro Optical Systems  
Robert-Stirling-Ring 1  
D-82152 Krailling/Munich  
Germany  
Phone +49 89 893 36-0  
info@eos.info

### Product Information

DMLS System	EOS M 300-4
Material	EOS NickelAlloy IN625
Process	40 $\mu\text{m}$ layer thickness
Inert Gas	Argon
Recoater blade	HSS, two-sided recoating
Volume rate	up to 4 x 4.2 mm <sup>3</sup> /s

### Layout of test job

Part properties based on 2 test jobs each for as manufactured and heat treated data.

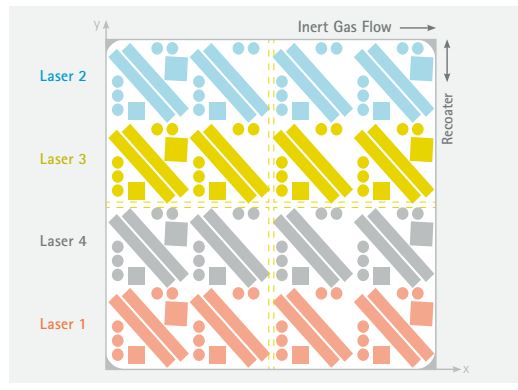

www.eos.info

in EOS  
EOS GmbH  
EOS.global  
EOS GmbH  
#ShapingFuture  
#ResponsibleManufacturing

### Further Offices

EOS France  
Phone +33 437 497 676

EOS Greater China  
Phone +86 21 602 307 00

EOS India  
Phone +91 443 964 8000

### Typical part properties

	Yield strength $R_{p0.2}$ [MPa]	Tensile strength $R_m$ [MPa]	Elongation at break A [%]	Number of samples
As manufactured vertical	611	852	48.2	160
As manufactured horizontal	750	1030	32.9	64
Heat treated vertical	606	862	52.1	160
Heat treated horizontal	692	1041	35.6	64
Max. pore size	50 $\mu\text{m}$			64
Porosity	0.006 %			64

Mechanical properties tested according to EN ISO 6892-1 B10. The values in the table are average values and dependent on the thermal load of the job layout as well as the position on the build plate.

Heat treatment procedure: anneal at 870 °C (1600 °F) for 1 hour, rapid cooling

Status 02/2022

EOS is certified according to ISO 9001. EOS®, DMLS® and EOSPRINT® are registered trademarks of EOS GmbH Electro Optical Systems in some countries. For more information visit [www.eos.info/trademarks](http://www.eos.info/trademarks).

Part properties stated above are provided for information purposes only and EOS makes no representation or warranty whatsoever, and disclaims any liability, with respect to actual part properties achieved with this material. Part properties are subject to variation and dependent on factors such as system parameters, process and test geometries. Therefore actual part properties may deviate and users of this material are exclusively responsible to determine its suitability for the intended use. The part properties stated above have been determined by testing this material with above specified type of EOS Laser Powder Bed Fusion system, EOSYSTEM and EOSPRINT software version, parameter set and operation in compliance with parameter sheet and operating instructions. Part properties are measured with specified measurement methods using defined test geometries and procedures. Further details of the test procedures used by EOS are available on request.

### Important Note

This data sheet specifies the powder properties of the EOS powder type referenced above. If you purchase powder from EOS, EOS will deliver such powder in conformity with the version of this data sheet prevailing at the time of your order. If you purchase powder from any source other than EOS, EOS makes no warranties or representations with respect to powder properties to you whatsoever, and claims with respect to the quality or properties of EOS powder are available only against the seller of such powder in accordance with your agreement with the seller, not against EOS. EOS data sheets are subject to change without notice. This data sheet does not constitute a warranty or warranty of properties or fitness for a specific purpose and may not be relied upon as such.

EOS Italy  
Phone +39 023 340 1659

EOS Japan  
Phone +81 45 670 0250

EOS Korea  
Phone +82 2 6330 5800

EOS Nordic & Baltic  
Phone +46 31 760 4640

EOS North America  
Phone +1 877 388 7916

EOS Singapore  
Phone +65 6430 0463

EOS UK  
Phone +44 1926 675 110

